


DS-2CC11A1P(N)(-A)


700 TVL High Definition Box Camera

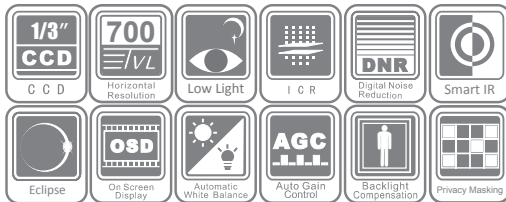

Key features

- 1/3" SONY CCD
- 700 TVL Horizontal Resolution
- True Day/Night (DS-2CC11A1P(N)-A)
- OSD Menu
- DNR, Digital WDR
- 12 VDC / 24 VAC (DS-2CC11A1P(N)-A)

Dimensions

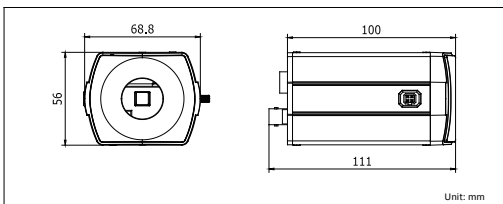

	DS-2CC11A1P(N)	DS-2CC11A1P(N)-A
Camera		
Image Sensor	1/3" SONY CCD	
Signal System	PAL/NTSC	
Effective Pixels	PAL: 976 (H) × 582 (V), NTSC: 976 (H) × 494 (V)	
Min. Illumination	0.001 Lux @ (F1.2, AGC ON)	Color: 0.001 Lux @ (F1.2, AGC ON) B/W: 0.0001 Lux @ (F1.2, AGC ON)
Shutter speed	PAL: 1/50 s to 1/10,000 s NTSC: 1/60 s to 1/10,000 s	
Lens Mount	C/CS mount	
Auto Iris	DC drive	
Day & Night	Electronic	IR cut filter with auto switch
Horizontal Resolution	700TVL	
Synchronization	Internal synchronization	Internal/Power synchronization
Video Output	1Vp-p composite output (75 Ω/BNC)	
S/N Ratio	More than 62 dB	
Menu		
Camera ID	On/Off (52 letters, position adjustable)	
D/N Mode	Auto /Day /Night	Auto /Day /Night/ EXT1/ EXT2
White Balance	ATW/PUSH/USER1/USER2/ANTI CR/MANUAL/PUSH LOCK	
Private Mask	On/Off, maximum 8 zones	
Motion Detection	On/Off	
Back Light	BLC/HLC/Off	
Language	Chinese/ English/ Japanese/ German/ French/ Russian/ Portuguese/ Spanish	
Function	ATR, HLC, DNR, Sharpness, Brightness, Contrast, Hue, Gain, Mirror, Defect Pixel Correction	SMART IR, ATR, HLC, DNR, Sharpness, Brightness, Contrast, Hue, Gain, Mirror, Defect Pixel Correction
General		
Working Temperature/Humidity	-10 °C - 60 °C (14 °F - 140 °F) Humidity 90% or less (non-condensing)	
Power Supply	12 V DC ± 10%	24 V AC ± 10%, 12 V DC ± 10%
Power Consumption	Max. 2 W	Max. 2 W (Max. 4 W with IR cut filter on)
Dimensions	68.8 x 56 x 111 mm (2.71" × 2.20" × 4.37")	
Weight	400 g (0.88 lbs)	

Available models

PAL: DS-2CC11A1P, DS-2CC11A1P-A
NTSC: DS-2CC11A1N, DS-2CC11A1N-A

Accessories

